NEOTERRA

Drive The New World

DARRON CENTER, NO.180 HAIER ROAD | QINGDAO, CHINA | 86-532-55579148 | INFO@KETERTYRE.COM

WWW.NEOTERRATIREUSA.COM

NEOTERRA

Drive The New World

TRUCK & BUS TYRES CATALOG



2023-2024

DRIVE THE NEW WORLD!



CONTENTS



AP201

Regional All Position

01



AP221

Specialty All Position

03



CD301

Closed Shoulder Drive

05



OD311

Open Shoulder Drive

07



OD321

All Season Drive

09



CT401

Commercial Trailer

11



MS231

Mixed Service All Position

13



MS241

Mixed Service
Wide-base All Position

15



MS321

Mixed Service Drive

17



MS331

Mixed Service Drive

19

AP201



Long Service Life
Advanced wear-resistant compound with dual-layer tread offers long service life.

Wide Footprint
Premium 5-rib design with wide footprint offers slow, uniform wear and enhanced handling.

All-Weather Traction
Special groove design and rib edge sipes enhances traction in all weather conditions.

Guaranteed Retreadability
Premium casing construction promotes consistent footprint and guaranteed retreadability.

REGIONAL ALL POSITION



AP201
SIZE & SPECIFICATION

SIZE	PR/LR	LOAD INDEX / SPEED SYMBOL	STANDARD RIM	OVERALL DIAMETER (MM/IN)	SECTION WIDTH (MM/IN)	SINGLE LOAD (KG/LBS)	DUAL LOAD (KG/LBS)	PRESSURE (KPA/PSI)	TREAD DEPTH (MM/32NDS)
11R22.5	14 / G	144/142 L	8.25	1065 / 41.9	279 / 11.0	2800 / 6175	2650 / 5840	720 / 105	14.3 / 18.0
11R22.5	16 / H	148/145 L	8.25	1054 / 41.5	279 / 11.0	3150 / 6940	2900 / 6390	850 / 123	14.3 / 18.0
11R24.5	14 / G	146/143 L	8.25	1116 / 43.9	279 / 11.0	3000 / 6610	2725 / 6005	720 / 105	14.3 / 18.0
11R24.5	16 / H	149/146 L	8.25	1104 / 43.5	279 / 11.0	3250 / 7160	3000 / 6610	830 / 120	14.3 / 18.0
295/75R22.5	14 / G	144/141 M	8.25	1014 / 39.9	298 / 11.7	2800 / 6175	2575 / 5675	760 / 110	14.3 / 18.0
295/75R22.5	16 / H	146/143 M	8.25	1014 / 39.9	298 / 11.7	3000 / 6610	2725 / 6005	830 / 120	14.3 / 18.0
315/80R22.5	20 / L	157/154 L	9.00	1076 / 42.4	312 / 12.3	4125 / 9090	3750 / 8270	900 / 130	15.9 / 20.0
285/75R24.5	14 / G	144/141 L	8.25	1050 / 41.3	283 / 11.1	2800 / 6175	2575 / 5675	760 / 110	14.3 / 18.0
285/75R24.5	16 / H	147/144 L	8.25	1050 / 41.3	283 / 11.1	3075 / 6780	2800 / 6175	830 / 120	14.3 / 18.0

AP221



Long Miles to Removal
Innovative tread compound provide enhanced high-scrub resistance for long miles to removal.

Superb Traction
Optimized tread block geometry with special groove sipes offers superb traction and quick response on wet or slippery roads.

Enhanced Protection
Wide enhanced shoulder increased protection against curb damage and irregular wear.

Guaranteed Retreadability
Premium casing construction provides toughness and durability for guaranteed retreadability.

SPECIALTY ALL POSITION

AP221
SIZE & SPECIFICATION

SIZE	PR/LR	LOAD INDEX / SPEED SYMBOL	STANDARD RIM	OVERALL DIAMETER (MM/IN)	SECTION WIDTH (MM/IN)	SINGLE LOAD (KG/LBS)	DUAL LOAD (KG/LBS)	PRESSURE (KPA/PSI)	TREAD DEPTH (MM/32NDS)
215/75R17.5	16 / H	127/124 M	6.00	767 / 30.2	211 / 8.3	1750 / 3860	1600 / 3525	830 / 120	12.8 / 16.1
215/75R17.5	16 / H	135/133 J	6.00	767 / 30.2	211 / 8.3	2180 / 4805	2060 / 4540	850 / 125	12.8 / 16.1
235/75R17.5	18 / J	143/141 J	6.75	797 / 31.4	233 / 9.2	2725 / 6010	2575 / 5675	850 / 125	12.8 / 16.1
225/70R19.5	14 / G	128/126 L	6.75	811 / 31.9	226 / 8.9	1800 / 3970	1700 / 3750	760 / 110	14.3 / 18.0
245/70R19.5	16 / H	135/133 M	7.50	839 / 33.0	248 / 9.8	2180 / 4805	2060 / 4540	830 / 120	15.0 / 18.9
255/70R22.5	16 / H	140/137 M	7.50	930 / 36.6	255 / 10.0	2500 / 5510	2300 / 5070	830 / 120	15.0 / 18.9
275/70R22.5	16 / H	148/145 M	8.25	958 / 37.7	276 / 10.9	3150 / 6940	2900 / 6390	900 / 130	15.9 / 20.0



CD301

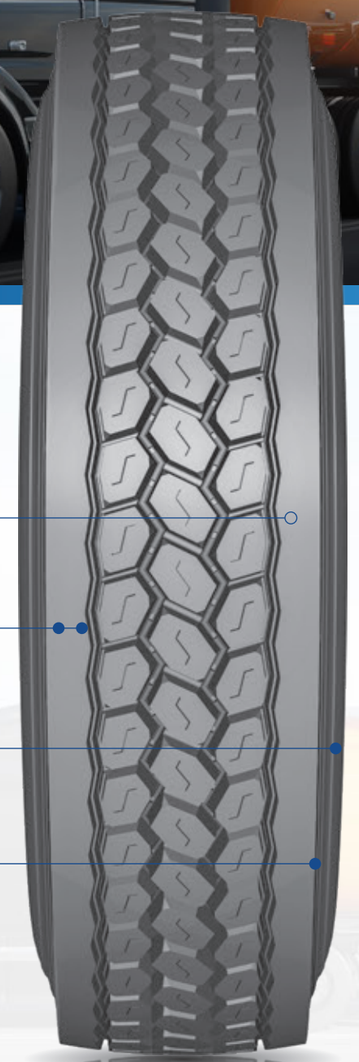

Long Original Mileage
Deep tread with innovative compound promotes long original mileage.

Uniform Wear
Closed shoulder design provides uniform wear throughout the life of the tire.

Enhanced Handling
Aggressive design with wide footprint delivers enhanced handling and brake response.

Guaranteed Retreadability
Premium casing construction provides toughness and durability for guaranteed retreadability.

CLOSED SHOULDER DRIVE



CD301

SIZE & SPECIFICATION

SIZE	PR/LR	LOAD INDEX / SPEED SYMBOL	STANDARD RIM	OVERALL DIAMETER (MM/IN)	SECTION WIDTH (MM/IN)	SINGLE LOAD (KG/LBS)	DUAL LOAD (KG/LBS)	PRESSURE (KPA/PSI)	TREAD DEPTH (MM/32NDS)
11R22.5	14 / G	144/142 L	8.25	1065 / 41.9	279 / 11.0	2800 / 6175	2650 / 5840	720 / 105	21.4 / 27.0
11R22.5	16 / H	146/143 L	8.25	1065 / 41.9	279 / 11.0	3000 / 6610	2725 / 6005	830 / 120	21.4 / 27.0
11R24.5	14 / G	146/143 L	8.25	1116 / 43.9	279 / 11.0	3000 / 6610	2725 / 6005	720 / 105	21.4 / 27.0
11R24.5	16 / H	149/146 L	8.25	1116 / 43.9	279 / 11.0	3250 / 7160	3000 / 6610	830 / 120	21.4 / 27.0
295/75R22.5	14 / G	144/141 L	8.25	1020 / 40.2	298 / 11.7	2800 / 6175	2575 / 5675	760 / 110	21.4 / 27.0
295/75R22.5	16 / H	146/143 L	8.25	1020 / 40.2	298 / 11.7	3000 / 6610	2725 / 6005	830 / 120	21.4 / 27.0
285/75R24.5	14 / G	144/141 L	8.25	1056 / 41.6	283 / 11.1	2800 / 6175	2575 / 5675	760 / 110	22.5 / 28.3
285/75R24.5	16 / H	147/144 L	8.25	1050 / 41.3	283 / 11.1	3075 / 6780	2800 / 6175	830 / 120	22.5 / 28.3

OD311



Long Service Life

Innovative tread compound with advanced tread design delivers wear resistance and scrubbing resistance for long service life.

Superior Traction

Open shoulder design delivers enhanced traction and acceleration in all weather conditions.

Enhanced Handling

Aggressive design with wide footprint delivers enhanced handling and superior brake response.

Guaranteed Retreadability

Premium casing construction provides toughness and durability for guaranteed retreadability.

OPEN SHOULDER DRIVE

OD311

SIZE & SPECIFICATION

SIZE	PR/LR	LOAD INDEX / SPEED SYMBOL	STANDARD RIM	OVERALL DIAMETER (MM/IN)	SECTION WIDTH (MM/IN)	SINGLE LOAD (KG/LBS)	DUAL LOAD (KG/LBS)	PRESSURE (KPA/PSI)	TREAD DEPTH (MM/32NDS)
11R22.5	14 / G	144/142 L	8.25	1065 / 41.9	279 / 11.0	2800 / 6175	2650 / 5840	720 / 105	20.6 / 26.0
11R22.5	16 / H	146/143 L	8.25	1065 / 41.9	279 / 11.0	3000 / 6610	2725 / 6005	830 / 120	20.6 / 26.0
11R24.5	14 / G	146/143 L	8.25	1116 / 43.9	279 / 11.0	3000 / 6610	2725 / 6005	720 / 105	20.6 / 26.0
11R24.5	16 / H	149/146 L	8.25	1116 / 43.9	279 / 11.0	3250 / 7160	3000 / 6610	830 / 120	20.6 / 26.0
225/70R19.5	14 / G	128/126 L	6.75	811 / 31.9	226 / 8.9	1800 / 3970	1700 / 3750	760 / 110	15.0 / 18.9
245/70R19.5	16 / H	135/133 L	7.50	839 / 33.0	248 / 9.8	2180 / 4805	2060 / 4540	830 / 120	15.9 / 20.0
255/70R22.5	16 / H	140/137 L	7.50	930 / 36.6	255 / 10.0	2500 / 5510	2300 / 5070	830 / 120	17.5 / 22.0
295/75R22.5	14 / G	144/141 L	8.25	1020 / 40.2	298 / 11.7	2800 / 6175	2575 / 5675	760 / 110	20.6 / 26.0
295/75R22.5	16 / H	146/143 L	8.25	1020 / 40.2	298 / 11.7	3000 / 6610	2725 / 6005	830 / 120	20.6 / 26.0
285/75R24.5	14 / G	144/141 L	8.25	1056 / 41.6	283 / 11.1	2800 / 6175	2575 / 5675	760 / 110	22.5 / 28.3
285/75R24.5	16 / H	147/144 L	8.25	1050 / 41.3	283 / 11.1	3075 / 6780	2800 / 6175	830 / 120	22.5 / 28.3

OD321



Ultimate Traction
Dynamic tread design with premium performance compound promotes ultra traction needed for all applications in harsh weather conditions.

Powerful Grip
Unique 3D sipes and optimized block design add extra gripping power in diverse weather conditions.

Added Traction Performance
Unique groove design and open shoulder increases cleaning ability for added traction performance.

Guaranteed Retreadability
Premium casing construction provides toughness and durability for guaranteed retreadability.

ALL SEASON DRIVE

OD321
SIZE & SPECIFICATION

SIZE	PR/LR	LOAD INDEX / SPEED SYMBOL	STANDARD RIM	OVERALL DIAMETER (MM/IN)	SECTION WIDTH (MM/IN)	SINGLE LOAD (KG/LBS)	DUAL LOAD (KG/LBS)	PRESSURE (KPA/PSI)	TREAD DEPTH (MM/32NDS)
11R22.5	14 / G	144/142 L	8.25	1065 / 41.9	279 / 11.0	2800 / 6175	2650 / 5840	720 / 105	22.5 / 28.3
11R22.5	16 / H	146/143 L	8.25	1065 / 41.9	279 / 11.0	3000 / 6610	2725 / 6005	830 / 120	22.5 / 28.3
11R24.5	14 / G	146/143 L	8.25	1116 / 43.9	279 / 11.0	3000 / 6610	2725 / 6005	720 / 105	22.5 / 28.3
11R24.5	16 / H	149/146 L	8.25	1116 / 43.9	279 / 11.0	3250 / 7160	3000 / 6610	830 / 120	22.5 / 28.3
295/75R22.5	14 / G	144/141 L	8.25	1020 / 40.2	298 / 11.7	2800 / 6175	2575 / 5675	760 / 110	22.5 / 28.3
295/75R22.5	16 / H	146/143 L	8.25	1020 / 40.2	298 / 11.7	3000 / 6610	2725 / 6005	830 / 120	22.5 / 28.3



CT401



Low Rolling Resistance
Special tread compound with shallow non-skid offers low rolling resistance.

Enhanced Toughness and Even Wear
Solid shoulder rib with unique pressure distribution grooves delivers enhanced toughness and promotes long, even wear.

Wet Weather Stability
Wide center groove delivers superior water evacuation for increased stability in wet road conditions.

Guaranteed Retreadability
Premium casing construction promotes multiple retreads.

COMMERCIAL TRAILER

CT401
SIZE & SPECIFICATION

SIZE	PR/LR	LOAD INDEX / SPEED SYMBOL	STANDARD RIM	OVERALL DIAMETER (MM/IN)	SECTION WIDTH (MM/IN)	SINGLE LOAD (KG/LBS)	DUAL LOAD (KG/LBS)	PRESSURE (KPA/PSI)	TREAD DEPTH (MM/32NDS)
11R22.5	14 / G	144/142 M	8.25	1054 / 41.5	279 / 11.0	2800 / 6175	2650 / 5840	720 / 105	11.7 / 14.7
11R22.5	16 / H	146/143 M	8.25	1054 / 41.5	279 / 11.0	3000 / 6610	2725 / 6010	830 / 120	11.7 / 14.7
11R24.5	14 / G	146/143 L	8.25	1116 / 43.9	279 / 11.0	3000 / 6610	2725 / 6010	720 / 105	11.7 / 14.7
11R24.5	16 / H	149/146 L	8.25	1116 / 43.9	279 / 11.0	3250 / 7160	3000 / 6610	830 / 120	11.7 / 14.7
295/75R22.5	14 / G	144/141 M	8.25	1014 / 39.9	298 / 11.7	2800 / 6175	2575 / 5675	760 / 110	11.7 / 14.7
295/75R22.5	16 / H	146/143 M	8.25	1014 / 39.9	298 / 11.7	3000 / 6610	2725 / 6005	830 / 120	11.7 / 14.7

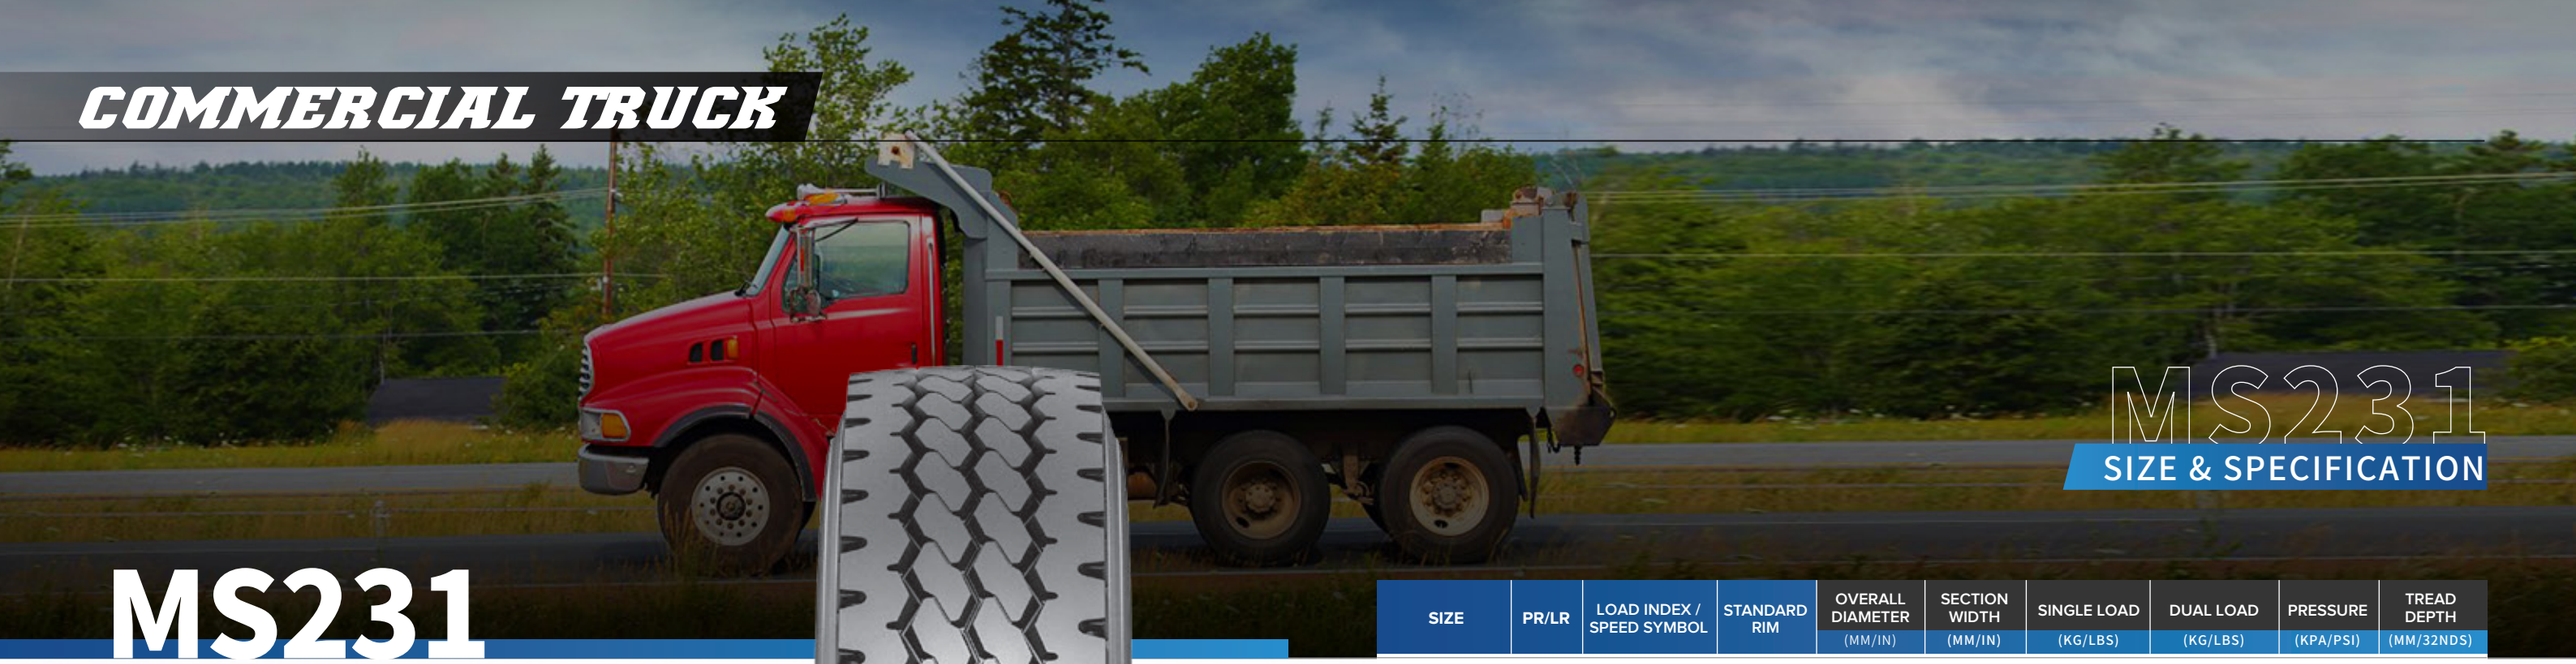

MS231



Long Service Life
Premium chip/cut resistant compound offers long service life in on and off road applications.

Improved Stability
Optimized tread design with wider footprint improves stability and traction on various driving surfaces.

Adaptable Flexibility
Special bead bundle package allows more flexibility in dealing with road obstacles.

Guaranteed Retreadability
Premium enhanced casing construction offers toughness and outstanding performance through retread cycle.

MIXED SERVICE ALL POSITION

MS231
SIZE & SPECIFICATION

SIZE	PR/LR	LOAD INDEX / SPEED SYMBOL	STANDARD RIM	OVERALL DIAMETER (MM/IN)	SECTION WIDTH (MM/IN)	SINGLE LOAD (KG/LBS)	DUAL LOAD (KG/LBS)	PRESSURE (KPA/PSI)	TREAD DEPTH (MM/32NDS)
11R22.5	14 / G	144/142 L	8.25	1065 / 41.9	279 / 11.0	2800 / 6175	2650 / 5840	720 / 105	18.3 / 23.0
11R22.5	16 / H	146/143 L	8.25	1065 / 41.9	279 / 11.0	3000 / 6610	2725 / 6010	850 / 123	18.3 / 23.0
11R24.5	14 / G	146/143 L	8.25	1116 / 43.9	279 / 11.0	3000 / 6610	2725 / 6010	720 / 105	18.3 / 23.0
11R24.5	16 / H	149/146 L	8.25	1104 / 43.5	279 / 11.0	3250 / 7160	3000 / 6610	830 / 120	18.3 / 23.0
255/70R22.5	16 / H	140/137 L	7.50	930 / 36.6	255 / 10.0	2500 / 5510	2300 / 5070	830 / 120	15.9 / 20.0
275/70R22.5	16 / H	148/145 M	8.25	958 / 37.7	276 / 10.9	3150 / 6940	2900 / 6390	900 / 130	17.5 / 22.0
315/80R22.5	20 / L	161/154 K	9.00	1076 / 42.4	312 / 12.3	4625 / 10200	3750 / 8270	900 / 130	18.3 / 23.0

MS241

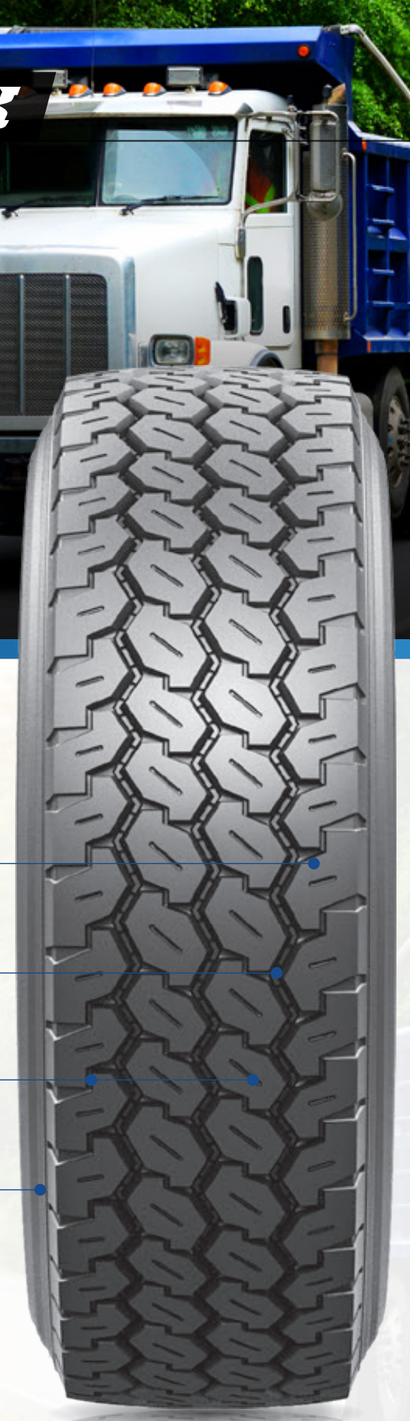

Enhanced Mileage
Advanced severe service compound resists cut, chips and tears and offers enhanced mileage.

All-Season Traction
Deep convex groove with biting edges provides all-season traction on wet, snowy or dry roads.

Improved Handling
Optimized block pattern promotes excellent strength and improved handling.

Guaranteed Retreadability
Premium enhanced casing construction offers toughness and outstanding performance through retread cycle.

MS241
SIZE & SPECIFICATION

SIZE	PR/LR	LOAD INDEX / SPEED SYMBOL	STANDARD RIM	OVERALL DIAMETER (MM/IN)	SECTION WIDTH (MM/IN)	SINGLE LOAD (KG/LBS)	DUAL LOAD (KG/LBS)	PRESSURE (KPA/PSI)	TREAD DEPTH (MM/32NDS)
385/65R22.5	20 / L	160 L	11.75	1072 / 42.2	389 / 15.3	4500 / 9920	-	900 / 130	18.3 / 23.0
425/65R22.5	20 / L	165 K	12.25	1124 / 44.3	422 / 16.6	5150 / 11400	-	830 / 120	18.3 / 23.0

MIXED SERVICE WIDE-BASE ALL POSITION

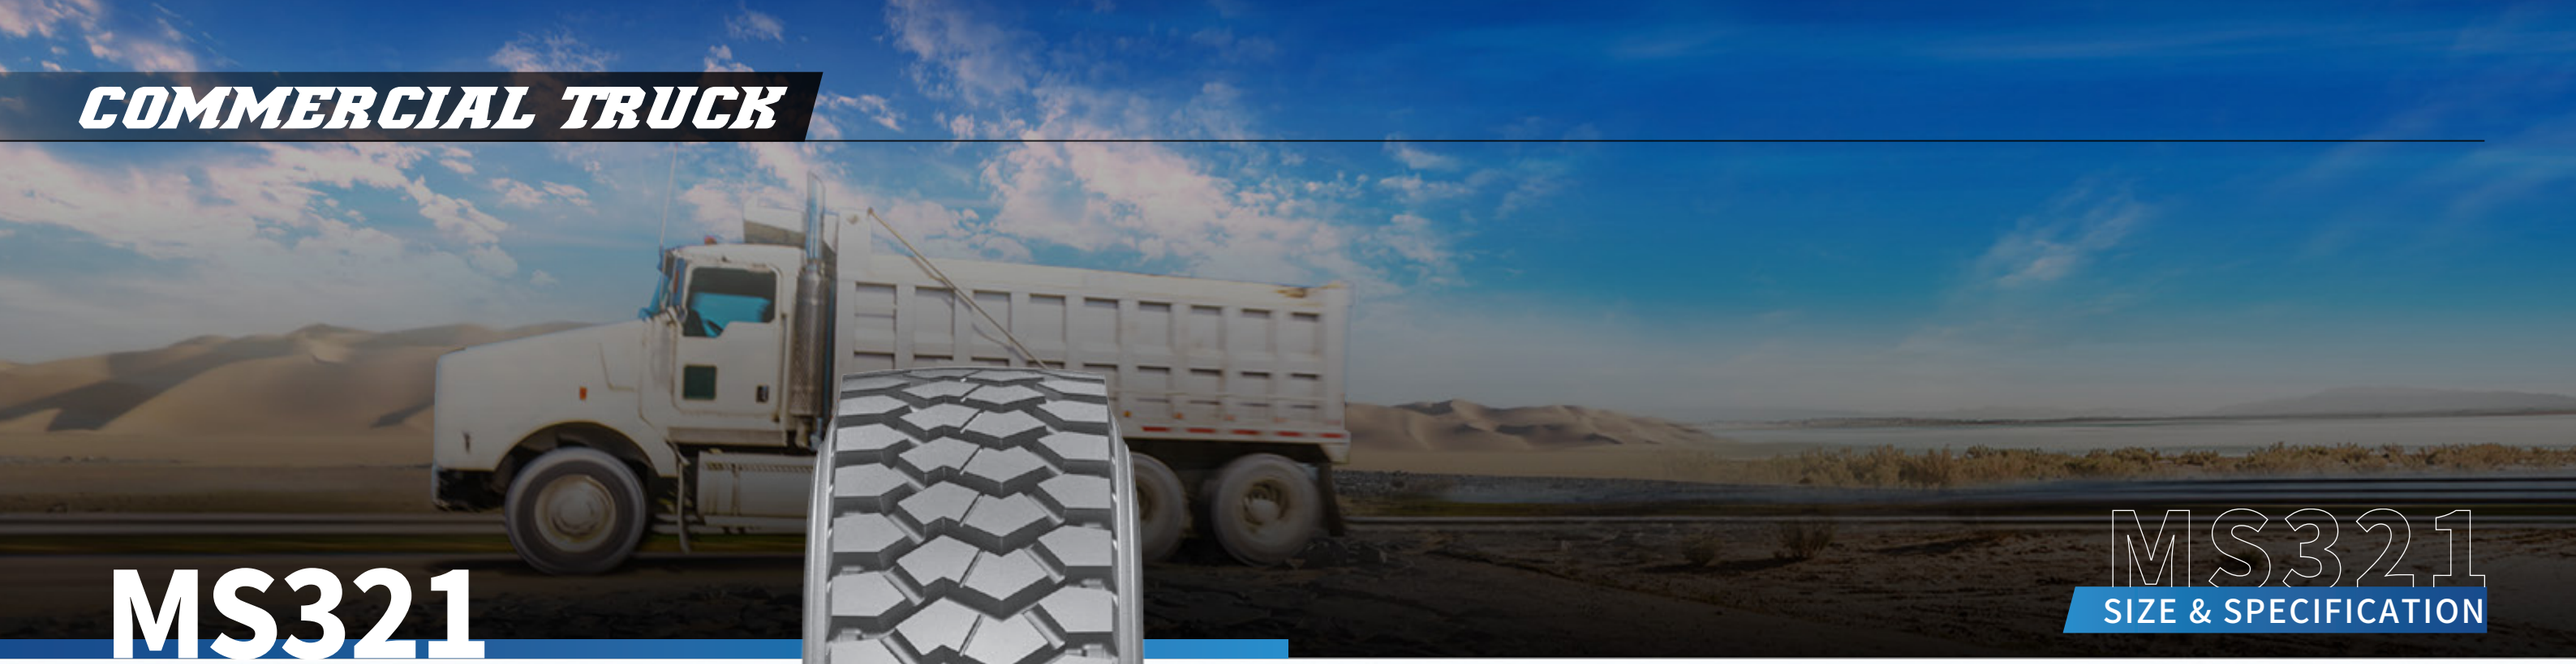

MS321



MS321
SIZE & SPECIFICATION

Extended Service Life
Dependable cut/chip resistance compound promotes extended service life.

Excellent Traction
Rugged lug design with deep non skid offers excellent traction in severe off-highway service.

Guaranteed Retreadability
Premium enhanced casing construction with deep undertread provides excellent retreadability.

MIXED SERVICE DRIVE

SIZE	PR/LR	LOAD INDEX / SPEED SYMBOL	STANDARD RIM	OVERALL DIAMETER (MM/IN)	SECTION WIDTH (MM/IN)	SINGLE LOAD (KG/LBS)	DUAL LOAD (KG/LBS)	PRESSURE (KPA/PSI)	TREAD DEPTH (MM/32NDS)
11R22.5	14 / G	144/142 L	8.25	1065 / 41.9	279 / 11.0	2800 / 6175	2650 / 5840	720 / 105	23.8 / 30.0
11R22.5	16 / H	146/143 L	8.25	1065 / 41.9	279 / 11.0	3000 / 6610	2725 / 6005	830 / 120	23.8 / 30.0
11R24.5	14 / G	146/143 L	8.25	1116 / 43.9	279 / 11.0	3000 / 6610	2725 / 6010	720 / 105	23.8 / 30.0
11R24.5	16 / H	149/146 L	8.25	1104 / 43.5	279 / 11.0	3250 / 7160	3000 / 6610	830 / 120	23.8 / 30.0
315/80R22.5	20 / L	161/154 K	9.00	1076 / 42.4	312 / 12.3	4625 / 10200	3750 / 8270	900 / 130	23.8 / 30.0

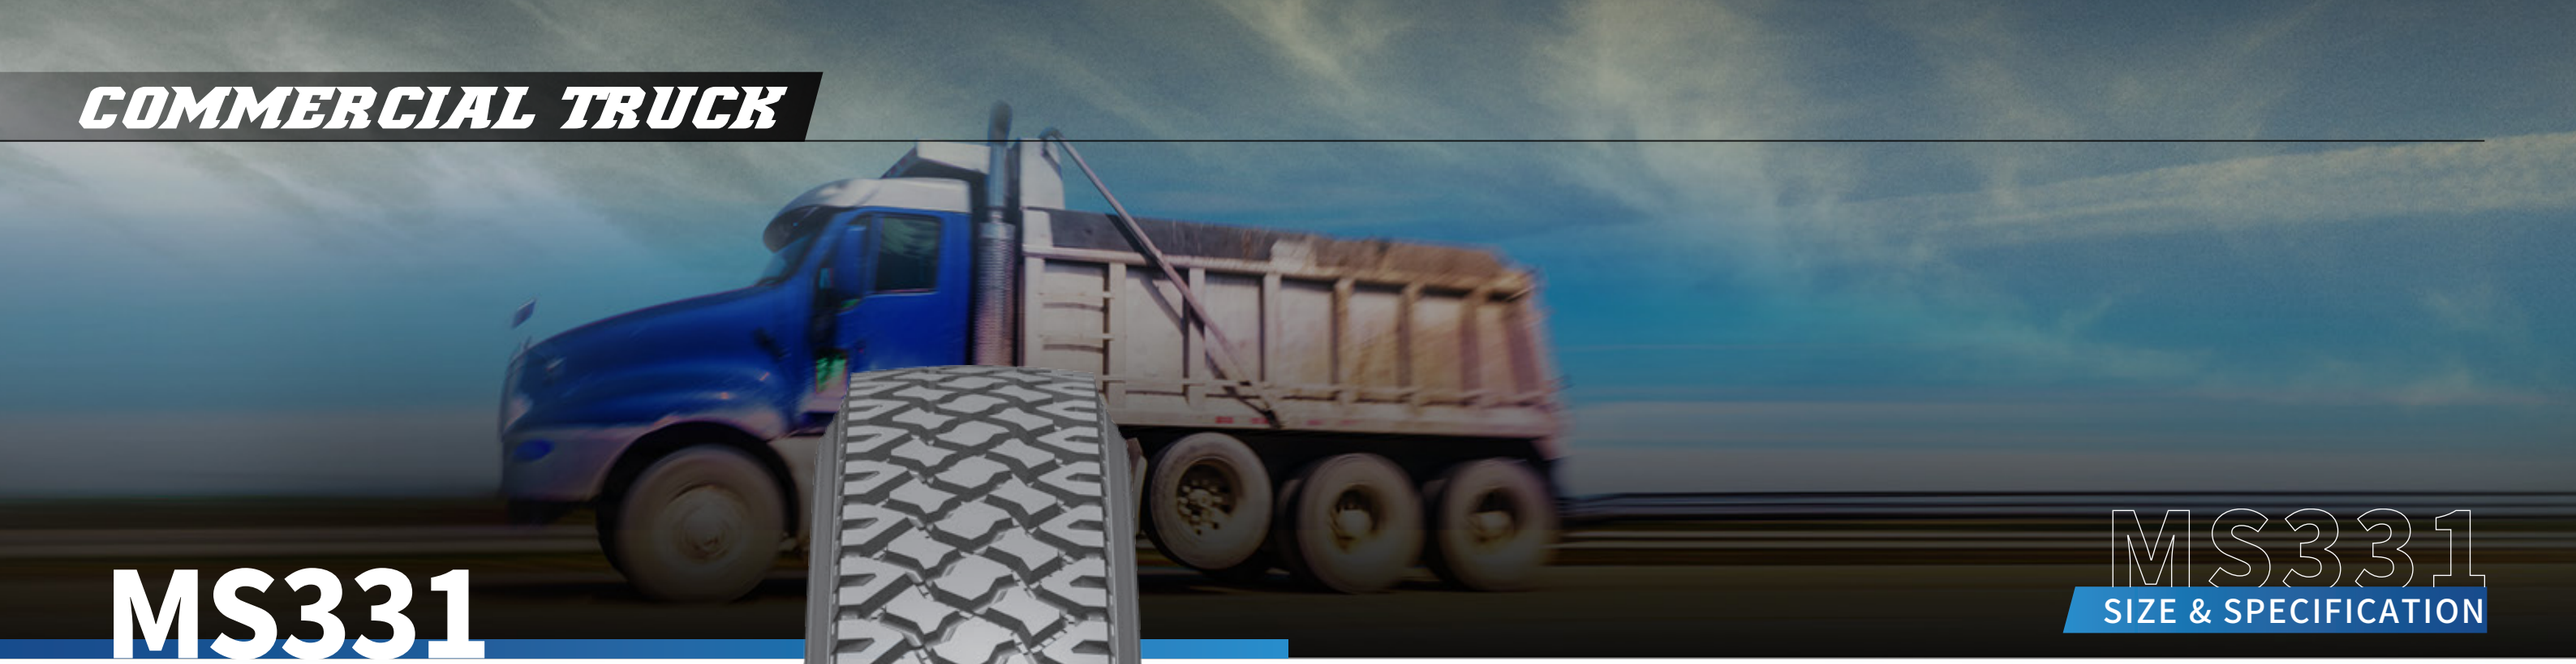

MS331



Extended Service Life

Premium severe service compound offers outstanding cut/chip resistance and extended service life in tough driving conditions.

Ultimate Off-Road Traction

Extra deep 33/32nd aggressive self-cleaning tread helps resist mud or snow buildup and promote ultimate traction.

Enhanced Stability

Optimized block design with in-between bridges allows enhanced stability and constant gripping power.

Guaranteed Retreadability

Premium enhanced casing construction with deep undertread provides excellent retreadability.

MIXED SERVICE DRIVE

MS331

SIZE & SPECIFICATION

SIZE	PR/LR	LOAD INDEX / SPEED SYMBOL	STANDARD RIM	OVERALL DIAMETER (MM/IN)	SECTION WIDTH (MM/IN)	SINGLE LOAD (KG/LBS)	DUAL LOAD (KG/LBS)	PRESSURE (KPA/PSI)	TREAD DEPTH (MM/32NDS)
11R22.5	14 / G	144/142 L	8.25	1065 / 41.9	279 / 11.0	2800 / 6175	2650 / 5840	720 / 105	26.2 / 33.0
11R22.5	16 / H	146/143 L	8.25	1065 / 41.9	279 / 11.0	3000 / 6610	2725 / 6005	830 / 120	26.2 / 33.0
11R24.5	14 / G	146/143 L	8.25	1116 / 43.9	279 / 11.0	3000 / 6610	2725 / 6010	720 / 105	26.2 / 33.0
11R24.5	16 / H	149/146 L	8.25	1104 / 43.5	279 / 11.0	3250 / 7160	3000 / 6610	830 / 120	26.2 / 33.0